



**Tensor, modelo comercial,
zamak, cincado**



A= Gancho-anillo


B= Anillo-anillo


C= Gancho-gancho

 Codigo	Longitud cuerpo mm	Rosca	Tensor mm	Peso kg/100	Cantidad
7.800-05K	50	M 5	30	3,0	50
7.800-06K	60	M 6	35	5,0	50
7.800-08K	70	M 8	45	6,5	25
7.800-10K	80	M 10	50	15,0	25
7.800-05	70	M 5	50	3,5	50
7.800-06	100	M 6	70	7,0	50
7.800-08	110	M 8	80	15,0	25
7.800-10	120	M 10	85	29,0	20
7.800-12	130	M 12	90	44,0	10

DIN 1480


Cuerpo tensor, cincado

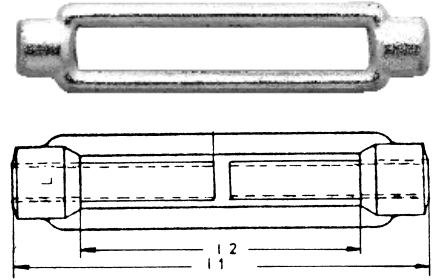


 Codigo	Rosca	Longitud cuerpo		Peso kg/100	Cantidad
		l 1 mm	l 2 mm		
7.1480-06M	M 6	110	80	5,5	
7.1480-08M	M 8	110	75	9,5	
7.1480-10M	M 10	125	85	15,5	
7.1480-12M	M 12	125	80	20,5	
7.1480-14M	M 14	140	90	31,0	
7.1480-16M	M 16	170	110	42,0	
7.1480-20M	M 20	200	130	74,0	
7.1480-22M	M 22	220	140	95,0	
7.1480-24M	M 24	255	170	130,0	
7.1480-30M	M 30	255	160	180,0	
7.1480-36M	M 36	295	180	310,0	
	Otras medidas sobre pedido				

DIN 1480

Tensor con union plana, cincado

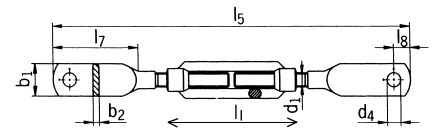



 Codigo									Peso	Cantidad
	d1	l1	Tensar	b1	b2	d4	l8	l5	kg/100	
7.1480-12PE	M12	125	80	30	5	13	15	345	20,5	
7.1480-16PE	M16	170	110	40	6	13	22	500	42	
7.1480-20PE	M20	200	130	50	6	16	27	505	74	

DIN 1480

Tensor, cincado


A= Gancho-anillo B= Anillo-anillo C= Gancho-gancho

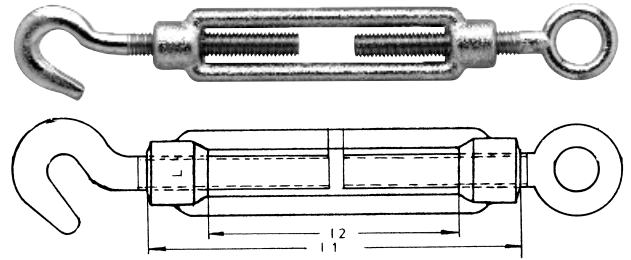



 Codigo	Rosca	Longitud cuerpo		Tensar	Peso kg/100	Cantidad
		l 1 mm	l 2 mm			
7.1480-06	M 6	110	80		9	
7.1480-08	M 8	110	75		15	
7.1480-10	M 10	125	85		27	
7.1480-12	M 12	125	80		41	
7.1480-14	M 14	140	90		60	
7.1480-16	M 16	170	110		100	
7.1480-20	M 20	200	130		154	
7.1480-22	M 22	220	140		200	
7.1480-24	M 24	255	170		270	
7.1480-30	M 30	255	160		435	
7.1480-36	M 36	295	180		725	
Otras medidas sobre pedido						

DIN 1480


Tensor, union para soldar,
pulido

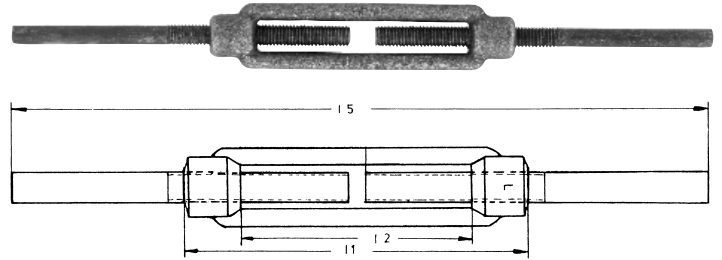

 Codigo	Rosca	Longitud Cuerpo	Tensar	Longitud	Peso	Cantidad
		l 1 mm	l 2 mm	l 5 mm	kg/100	
7.1480-06AE	M 6	110	80	240	9	
7.1480-08AE	M 8	110	75	240	14	
7.1480-10AE	M 10	125	85	300	29	
7.1480-12AE	M 12	125	80	300	40	
7.1480-14AE	M 14	140	90	330	66	
7.1480-16AE	M 16	170	110	400	89	
7.1480-20AE	M 20	200	130	440	160	
7.1480-22AE	M 22	220	140	440	227	
7.1480-24AE	M 24	255	170	520	282	
7.1480-30AE	M 30	255	160	520	423	
7.1480-36AE	M 36	295	180	600	707	





Tensor, union para soldar,
Cuerpo cincado


 Codigo	Rosca	Longitud Cuerpo	Tensar	Longitud	Peso	Cantidad
		l 1 mm	l 2 mm	l 5 mm	kg/100	
7.1480-06E	M 6	110	80	240	9	
7.1480-08E	M 8	110	75	240	14	
7.1480-10E	M 10	125	85	300	29	
7.1480-12E	M 12	125	80	300	40	
7.1480-14E	M 14	140	90	330	66	
7.1480-16E	M 16	170	110	400	89	
7.1480-20E	M 20	200	130	440	160	
7.1480-22E	M 22	220	140	440	227	
7.1480-24E	M 24	255	170	520	282	
7.1480-30E	M 30	255	160	520	423	
7.1480-36E	M 36	295	180	600	707	

DIN 1478

Cuerpo tensor tubular, cincado

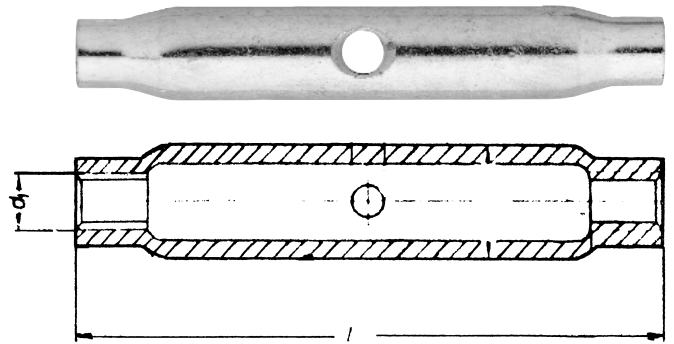


 Codigo	Rosca	Longitud cuerpo	Peso	Cantidad
	d1	l mm	kg/100	
7.1478-06M	M 6	110	10,2	
7.1478-08M	M 8	110	12,2	
7.1478-10M	M 10	125	19,5	
7.1478-12M	M 12	125	24,1	
7.1478-16M	M 16	170	37,0	
7.1478-20M	M 20	200	68,0	
7.1478-24M	M 24	255	110,0	
7.1478-30M	M 30	255	147,0	
7.1478-36M	M 36	295	245,0	
Otras medidas sobre pedido				

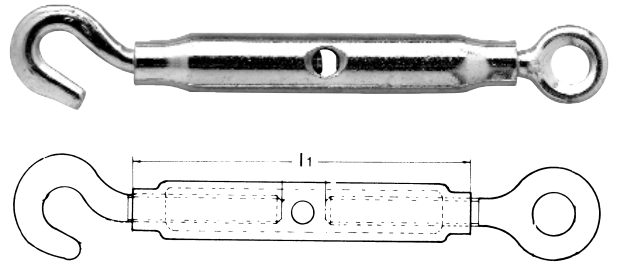

DIN 1478

Tensor, cincado

A= Gancho-anillo B= Anillo-anillo C= Gancho-gancho

 Código	Rosca	Longitud Cuerpo	Tensor	Peso	Cantidad
		l 1 mm	mm	kg/100	
7.1478-06	M 6	110	90	11	
7.1478-08	M 8	110	85	18	
7.1478-10	M 10	125	95	30	
7.1478-12	M 12	125	90	39	
7.1478-16	M 16	170	120	90	
7.1478-20	M 20	200	140	145	
7.1478-24	M 24	255	180	265	
7.1478-30	M 30	255	180	408	
7.1478-36	M 36	295	180	659	
Otras medidas sobre pedido					

—

—

—